

DESIGN SERIES

Palo cilindrico curvato
Curved cylindrical pole

Palo in acciaio a sezione circolare composto da due tratti curvati con sbraccio e codolo Ø60 più finale conico composto da due elementi tubolari saldati. Asola ingresso cavi e asola per morsettieria con finitura dei bordi del taglio idonea anche per l'applicazione di portella incassata a filo palo. Zincatura a caldo secondo la norma UNI EN ISO 1461 e successiva spazzolatura per garantire una perfetta finitura superficiale. Verniciatura a polveri poliestere.

Steel pole with circular section made up of two curved sections with outreach and Ø60 shank plus conical end made up of two welded tubular elements. Cable entry slot and terminal block slot with cut edge finish also suitable for the application of a recessed door flush with the pole. Hot galvanizing according to UNI EN ISO 1461 and subsequent brushing to guarantee a perfect surface finish. Polyester powder coating.




SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS

MODELLO Model	H	H1	H2	H3	H4	H5	D	D1	D2
PS.127.3.102.3.CL60.6000	6150	7150	800	200	800	7950	127	102	60
PS.127.3.102.3.CL60.7000	7150	8095	800	200	800	8895	127	102	60
PS.127.3.102.3.CL60.8000	8100	9080	1000	200	800	9880	127	102	60
PS.127.3.102.3.CL60.9000	9100	10060	1000	200	800	10860	127	102	60

SPESSORE Thickness	MATERIALE Material	PESO Weight	ASOLA MORS. Block Hole Hatch	ASOLA ING. CAVI Block Hole Cable Entry	PORTATA m2 /Kg * Technical Capacity m2/kg *
3 - 3 - 3	S235JR	78 Kg	H186xL45	H186xL45	0,1 / 15*
3 - 3 - 3	S235JR	83 Kg	H186xL45	H186xL45	0,1 / 15*
3 - 3 - 3	S235JR	87 Kg	H186xL45	H186xL45	0,1 / 15°
3 - 3 - 3	S235JR	91 Kg	H186xL45	H186xL45	0,1 / 15^

Zona 8 cat. II | Zone 8 cat. II

PIASTRA (OPZIONALE) Plate (Optional)	TIRAFONDO (OPZIONALE) Anchor Bolt (Optional)
L250xL250xS15 - I 180	Ø18 - L500
L250xL250xS15 - I 180	Ø18 - L500
L350xL350xS15 - I 250	Ø24 - L600
L350xL350xS20 - I 250	Ø24 - L600

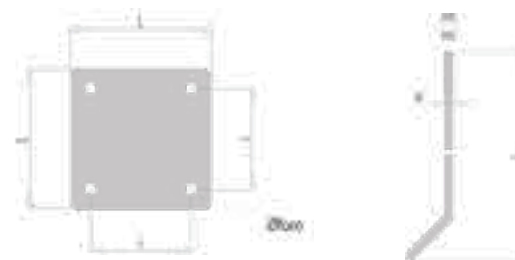

Valori espressi in millimetri | Measures in millimeters

PORTELLA CON MORSETTIERA (OPZIONALE)



TERMINAL BLOCK WITH HATCH (OPTIONAL)

PORTELLA ESTERNA External Cover Plate	PORTELLA FILO PALO Cover Plate
T39 G	RESET 16
T39 G	RESET 16
T39 G	RESET 16
T39 G	RESET 16



Disponibili a 1 o 2 fusibili | Available with 1 or 2 fuses

DISEGNO TECNICO TECHNICAL DESIGN

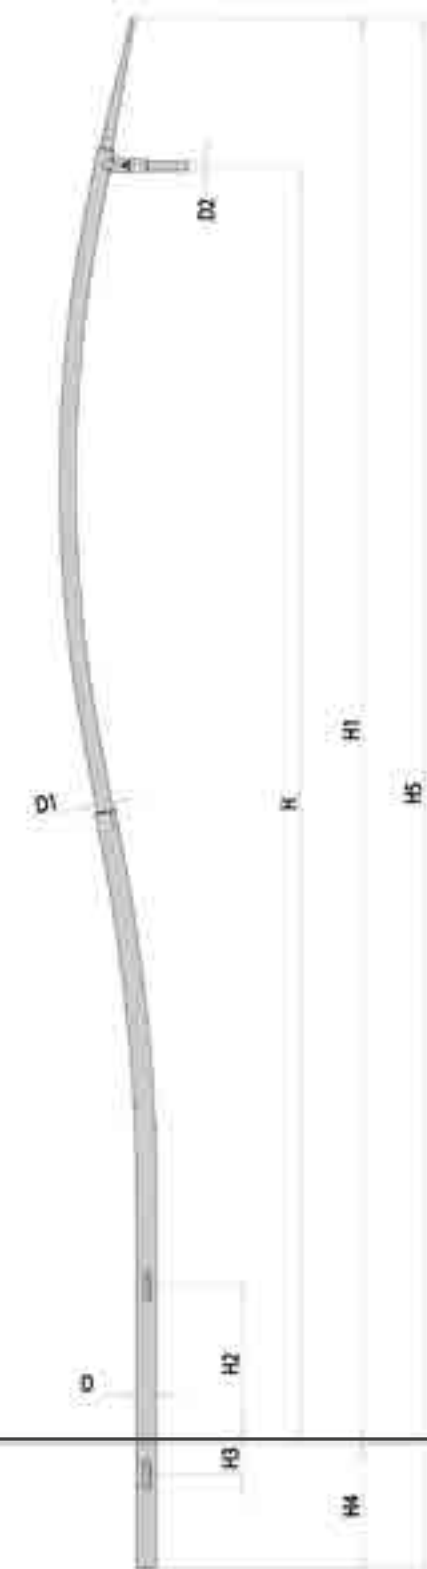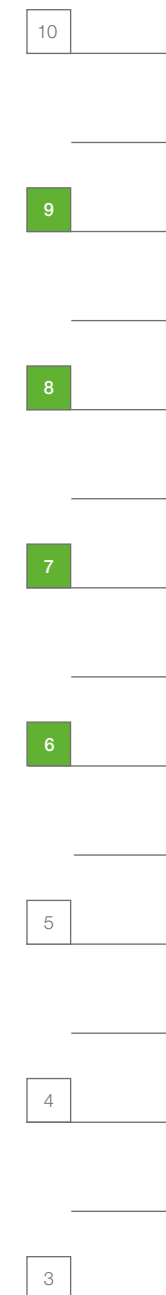

H

Altezza punto luce
Available luminaire heights

Valori espressi in metri | Measures in metres