

SERIE CILINDRICO C127 C

Palo cilindrico con codolo Ø 102
Cylindrical pole with spigot Ø 102

Palo in acciaio Ø127 a sezione circolare realizzato in un unico tratto con codolo finale, composto da elementi tubolari saldati in sequenza. Asola ingresso cavi e asola per morsetti con finitura del bordo del taglio idonea anche per l'applicazione di portella incassata a filo palo. Zincatura a caldo secondo la norma UNI EN ISO 1461 e successiva spazzolatura per garantire una perfetta finitura superficiale. Verniciatura a polveri poliestere.

Circular cross section steel pole Ø127 consisting of one single section with end spigot, made of tubular elements welded in sequence. Cable inlet slot and terminal box slot with finished edges, also suitable for the application of a flush mounted cover door. Hot galvanized in accordance with UNI EN ISO 1461, and subsequent brushing to ensure perfect surface finish. Polyester powder coating.

DISEGNO TECNICO TECHNICAL DESIGN




SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS

MODELLO Model	H	H1	H2	H3	H4	D	D1
C.127.3.C102.5000	5000	5500	1000	200	500	127	102
C.127.3.C102.6000	6000	6800	1000	200	800	127	102
C.127.3.C102.7000	7000	7800	1000	200	800	127	102
C.127.3.C102.8000	8000	8800	1000	200	800 </td <td>127</td> <td>102</td>	127	102

SPESSORE Thickness	MATERIALE Material	PESO Weight	ASOLA MORS. Block Hole Hatch	ASOLA ING. CAVI Block Hole Cable Entry	PORTATA m2 /Kg * Technical Capacity m2/kg *
3 - 3	S235JR	53 Kg	H186xL45	H132xL38	0,79 / 61
3 - 3	S235JR	65 Kg	H186xL45	H132xL38	0,53 / 41
3 - 3	S235JR	74 Kg	H186xL45	H132xL38	0,35 / 27
3 - 3	S235JR	83 Kg	H186xL45	H132xL38	0,26 / 20

Zona 8 cat. II | Zone 8 cat. II

PIASTRA (OPZIONALE) Plate (Optional)	TIRAFONDO (OPZIONALE) Anchor Bolt (Optional)
L250xL250S10 - I 180	Ø18 - L500
L250xL250S10 - I 180	Ø18 - L500
L250xL250S15 - I 180	Ø18 - L500
L250xL250S15 - I 180	Ø18 - L500

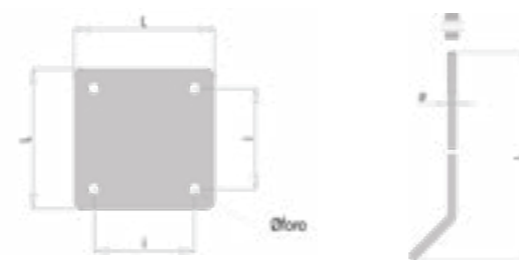

Valori espressi in millimetri | Measures in millimeters

PORTELLA CON MORSETTIERA (OPZIONALE) TERMINAL BLOCK WITH HATCH (OPTIONAL)

PORTELLA ESTERNA External Cover Plate	PORTELLA FILO PALO Cover Plate
T39 G	RESET 16
T39 G	RESET 16
T39 G	RESET 16
T39 G	RESET 16



Disponibili a 1 o 2 fusibili | Available with 1 or 2 fuses

10

9

8

7

6


5

4

3

H

Altezza punto luce
Available luminaire heights

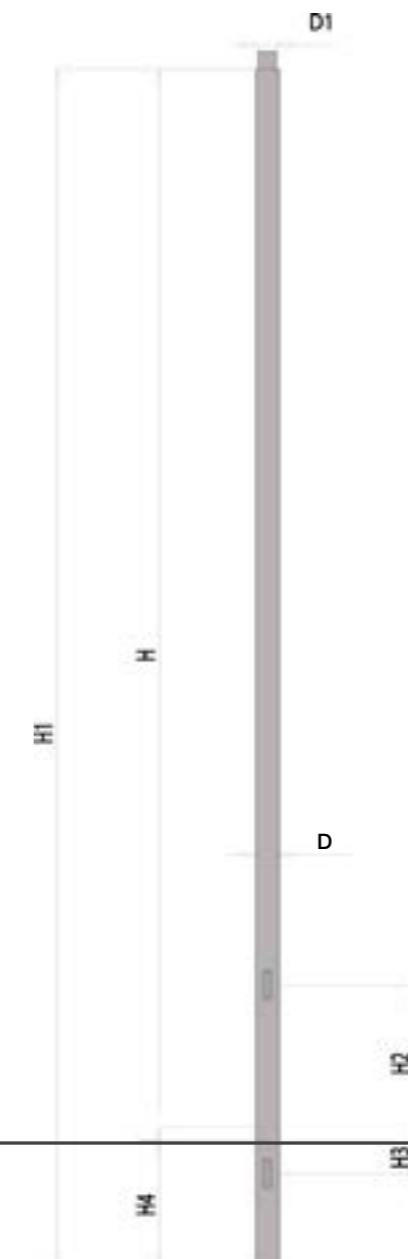

Valori espressi in metri | Measures in metres